




CORROSION INHIBITING ADDITIVES

M-530 Oil Based Corrosion Inhibitor

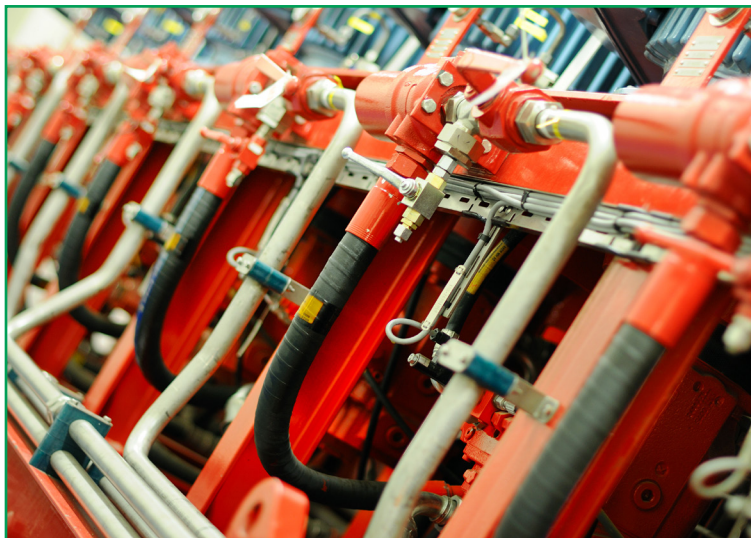

PRODUCT DESCRIPTION

M-530 is an oil-based package of corrosion inhibitors for hydraulic or lubricating oils. M-530 is a rust preventative product, which provides excellent protection during operating conditions and intermittent operations.

M-530 is very effective for mineral and synthetic oils: naphthenic, iso-paraffinic, PAOs, among others.

FEATURES

- Corrosion protection to ferrous and non-ferrous metals
- Does not contain hazardous barium, chromate, nitrite, or phosphate inhibitors
- Can be used in hydraulic applications
- Provides protection in the presence of chlorides
- Compatible with most mineral and synthetic oils
- Suitable for both operating and intermittent use conditions

TYPICAL APPLICATION

For hydraulic and lubricating oil systems in intermittent operations, add M-530 to oil at a concentration of 2-5% weight.

METALS PROTECTED

- Carbon Steel
- Stainless Steel
- Galvanized Steel
- Aluminum
- Brass
- Copper
- Cadmium
- Magnesium
- Silver
- Zinc
- Solder
- Tin
- Lead
- Bronze

TYPICAL PROPERTIES

Oil Characteristics		Typical Values
Appearance		Amber Color
Specific Gravity		0.91
Viscosity (ASTM D92)	40 °C	169 cSt
	100 °C	12.6 cSt
	Index	48
Pour Point (ASTM D6749)		-24 °C (-11 °F)
Flash Point (ASTM D92)		190 °C (374 °F)
Fire Point (ASTM D92)		198 °C (388 °F)
Total Acid Number (ASTM D974)	mg KOH/g	42.8
ISO Particle Count Code		19/18/14
Oil Separability (ASTM D1401) @ 82 °C (180 °F)	Oil, ml	40
	Water, ml	40
	Emulsion, ml	0
	Time, min	10
Foaming Characteristics (ASTM D892)	Seq. I	180/0/229
	Seq. II	25/0/8
	Seq. III	20/0/16

Properties listed above are typical of those obtained through normal production and do not constitute a specification. M-530 is generally soluble in hydrocarbon based fluids, however compatibility and solubility should be verified prior to use. Please contact Cortec® Technical Service for more information.

STANDARD TEST METHODS

ASTM D-4172	4-ball wear test
ASTM D-665	Rust Preventing Characteristics
ASTM D-974	Acid/Base Number by Titration
ASTM D-1401	Water separability testing
ASTM D-1748	Humidity testing
ASTM D-2196	Brookfield Viscometer
MIL-PRF-46002	Contact and Volatile Corrosion Inhibited Oil
MIL-PRF-85062	VCI Oil for Transmission and Gearbox

PACKAGING AND STORAGE

M-530 is available in 5 gallon (19 liter) plastic pails, 55 gallon (208 liter) metal drums, liquid totes, and bulk.

M-530 should be sealed before storage. The shelf life is up to 24 months.

FOR INDUSTRIAL USE ONLY
KEEP OUT OF REACH OF CHILDREN
KEEP CONTAINER TIGHTLY CLOSED
NOT FOR INTERNAL CONSUMPTION
CONSULT SAFETY DATA SHEET FOR MORE INFORMATION

LIMITED WARRANTY

All statements, technical information and recommendations contained herein are based on tests Cortec® Corporation believes to be reliable, but the accuracy or completeness thereof is not guaranteed.

Cortec® Corporation warrants Cortec® products will be free from defects when shipped to customer. Cortec® Corporation's obligation under this warranty shall be limited to replacement of product that proves to be defective. To obtain replacement product under this warranty, the customer must notify Cortec® Corporation of the claimed defect within six months after shipment of product to customer. All freight charges for replacement products shall be paid by customer.

Cortec® Corporation shall have no liability for any injury, loss or damage arising out of the use of or the inability to use the products.
BEFORE USING, USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT FOR ITS INTENDED USE,

AND USER ASSUMES ALL RISK AND LIABILITY WHATSOEVER IN CONNECTION THEREWITH. No representation or recommendation not contained herein shall have any force or effect unless in a written document signed by an officer of Cortec® Corporation.

THE FOREGOING WARRANTY IS EXCLUSIVE AND IN LIEU OF ALL OTHER WARRANTIES, EXPRESS, IMPLIED OR STATUTORY, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTY OF MERCHANTABILITY OR OF FITNESS FOR A PARTICULAR PURPOSE. IN NO CASE SHALL CORTEC® CORPORATION BE LIABLE FOR INCIDENTAL OR CONSEQUENTIAL DAMAGES.



Distributed by:

4119 White Bear Parkway, St. Paul, MN 55110 USA
Phone (651) 429-1100, Fax (651) 429-1122
Toll Free (800) 4-CORTEC, E-mail info@cortecvci.com
<http://www.cortecvci.com>

Printed on recycled paper  100% post consumer

Revised: 01/12/17. Supercedes: 08/22/16. ©Cortec Corporation 2002-2017 of Cortec Corporation.
All Rights Reserved. Copying of these materials in any form without the written authorization of Cortec Corporation is strictly prohibited. 2017, ©Cortec Corp. ISO accreditation applies to Cortec's processes only.