

Corshield® VpCI®-649 Nitrite Free Powder Corrosion Inhibitor



Powder contains 1.2% Mo by weight, in the form $\text{Na}_2\text{MoO}_4 \cdot 2\text{H}_2\text{O}$ (at 3.0% of total formulation). See reversed side for Mo vs. VpCI-649 Powder concentration chart

TYPICAL APPLICATIONS

- Open and closed loop cooling systems
- Fire extinguishing system dry lay-up
- Hydrostatic testing of pipelines, casings, tanks, and valves
- Cooling towers lay-up

METHOD OF APPLICATION

VpCI®-649 Powder should be added starting at (1500-2000 ppm) by weight to the water.

TYPICAL PROPERTIES

Appearance	White powder
Type	Water-soluble
Non-volatile Content	97-100%
pH	11-12.5 (1% solution in water)

PACKAGING

VpCI®-649 Powder is available in 5 pound (2.3 kg) water-soluble bags, 50 pound (22 kg), and 100 pound (45 kg) packages. Product should be stored in a tightly closed container. Shelf life is 24 months.

PRODUCT DESCRIPTION

VpCI®-649 Powder is a unique powder formulation for protecting different metals against corrosion. It is designed to provide long-term protection in open and closed loop cooling systems.


VpCI®-649 Powder combines contact and volatile corrosion inhibitors in a biodegradable formulation that does not contain nitrites, phosphates, chromates, or heavy metals. Being environmentally safe, it helps solve the problem of disposal, particularly for large quantities of water.

VpCI®-649 Powder also contains a blend of organic-based scale inhibitors, which prevent scale formation in pipes and towers.

FEATURES

- Effective for a broad range of applications to stop aggressive corrosion from fresh water
- Biodegradable, and nitrite-free
- Low concentration effectiveness provides economical treatment
- Vapor phase action provides protection to areas that contact inhibitors cannot reach
- Readily water-soluble
- Protects copper, steel, and galvanized steel
- Easy application
- Does not contain free amines
- Economical (100% active)
- Easily traceable utilizing a Molybdenum test kit. VpCI®-649

Theoretical concentration of Molybdenum vs. VpCI-649P

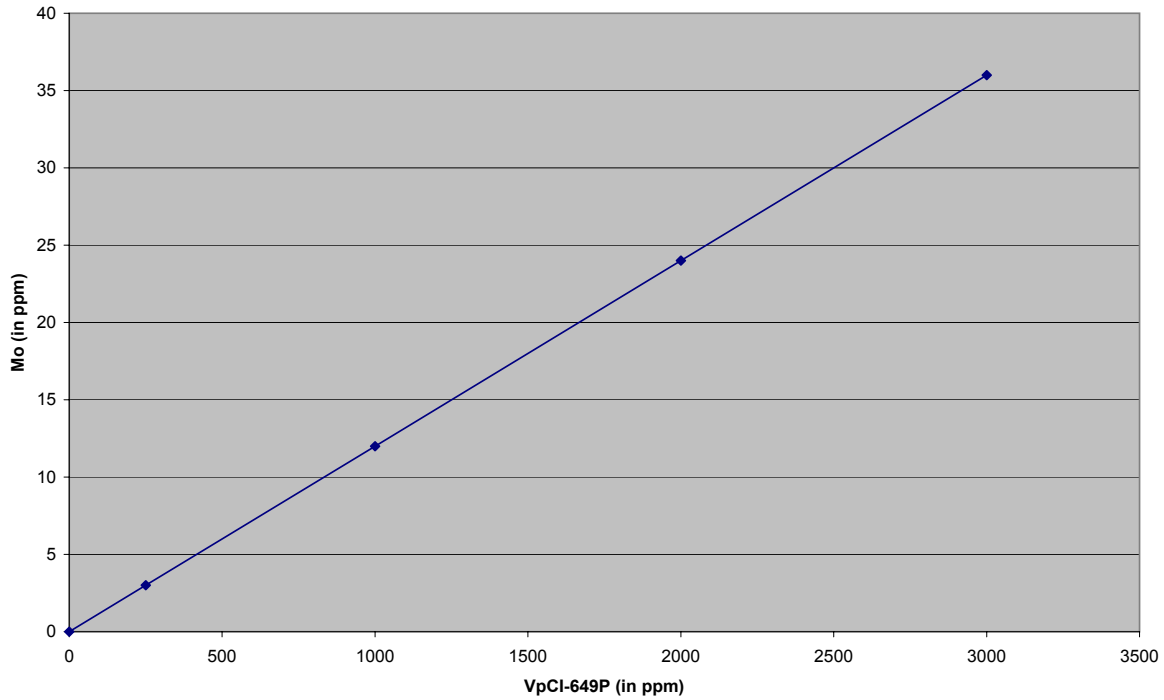

**FOR INDUSTRIAL USE ONLY
KEEP OUT OF REACH OF CHILDREN
KEEP CONTAINER TIGHTLY CLOSED
NOT FOR INTERNAL CONSUMPTION
CONSULT SAFETY DATA SHEET FOR MORE
INFORMATION**

LIMITED WARRANTY

All statements, technical information and recommendations contained herein are based on tests Cortec® Corporation believes to be reliable, but the accuracy or completeness thereof is not guaranteed.

Cortec® Corporation warrants Cortec® products will be free from defects when shipped to customer. Cortec® Corporation's obligation under this warranty shall be limited to replacement of product that proves to be defective. To obtain replacement product under this warranty, the customer must notify Cortec® Corporation of the claimed defect within six months after shipment of product to customer. All freight charges for replacement products shall be paid by customer.

Cortec® Corporation shall have no liability for any injury, loss or damage arising out of the use of or the inability to use the products.
BEFORE USING, USER SHALL DETERMINE THE SUITABILITY OF THE PRODUCT FOR ITS INTENDED USE,

AND USER ASSUMES ALL RISK AND LIABILITY WHATSOEVER IN CONNECTION THEREWITH. No representation or recommendation not contained herein shall have any force or effect unless in a written document signed by an officer of Cortec® Corporation.

THE FOREGOING WARRANTY IS EXCLUSIVE AND IN LIEU OF ALL OTHER WARRANTIES, EXPRESS, IMPLIED OR STATUTORY, INCLUDING WITHOUT LIMITATION ANY IMPLIED WARRANTY OF MERCHANTABILITY OR OF FITNESS FOR A PARTICULAR PURPOSE. IN NO CASE SHALL CORTEC® CORPORATION BE LIABLE FOR INCIDENTAL OR CONSEQUENTIAL DAMAGES.



Environmentally Safe VpCI®/MCI® Technologies

Distributed by:

4119 White Bear Parkway, St. Paul, MN 55110 USA
Phone (651) 429-1100, Fax (651) 429-1122
Toll Free (800) 4-CORTEC, E-mail info@cortecvci.com
<http://www.cortecvci.com>

Printed on recycled paper  100% post consumer

Revised: 07/10/17. Supersedes: 05/12/17. ©Cortec Corporation 2002-2017 of Cortec Corporation.
All Rights Reserved. Copying of these materials in any form without the written authorization of Cortec Corporation is strictly prohibited. 2017, ©Cortec Corp. ISO accreditation applies to Cortec's processes only.